



GENERAL MONITORS
Protection for life.

MODEL FL4000H

Multi-Spectrum Infrared Flame Detector



Features

- Multi-Spectrum IR (MSIR) Sensor Array
- Neural Network Technology (NNT)
- Continuous Optical Path Monitoring (COPM)
- Multiple Communication Outputs
- Event Logging
- Test Mode

Benefits

- Increased range and wide field of view
- Provides superior false alarm immunity
- Checks optical path integrity and detector's electronic circuitry
- Versatile for use in a variety of applications
- Standalone diagnostic tool
- Used to check all outputs (used with test lamp)

Description

The Model FL4000H is an advanced multi-spectrum flame detector designed to provide superior false alarm immunity with the widest field of view. The FL4000H employs a state-of-the-art multi-spectrum infrared (MSIR) sensor array with a sophisticated Neural Network Technology (NNT) system. The FL4000H is designed to detect typical fires such as those produced by alcohol, n-heptane, gasoline, jet fuels and hydrocarbons. In addition, the FL4000H can see through dense smoke produced by diesel, rubber, plastics, lube oil, and crude oil fires.

The NNT flame discrimination algorithm classifies the output signals from the MSIR sensor array as either fire or non-fire. The MSIR/NNT combination is highly immune to false alarms caused by lightning, arc-welding, hot objects, and other sources of radiation.

The FL4000H's electronics are housed in a stainless steel explosion-proof enclosure. The detector is available with the following output configurations:


- 4-20 mA stepped output
- Dual serial communications
- HART communication
- Warning, alarm and fault relays

The serial communication port(s) allows 128 units (247 using repeaters) to be linked up to a host computer using the Modbus RTU protocol. The communication registers provide alarm status, fault and other information for operating, troubleshooting or programming the unit.

The COPM (Continuous Optical Path Monitoring) self test checks the optical path integrity (window cleanliness) and the detector's electronic circuitry every two minutes.

Applications

- Drilling and Production Platforms
- Gas Turbines
- LNG/LPG Processing and Storage Facilities
- Fuel Loading Facilities
- Compressor Stations
- Electrostatic Paint Spray Booths
- Aircraft Hangars
- Refineries
- Chemical Plants



MODEL FL4000H

System Specifications


Spectral Range: 2 - 5 microns (IR)

Maximum Range: 230 ft. (70 m)*

Typical Response Time: < 10 s

Minimum Arc Welding Immunity Distance: 5-15 ft. (1.5-4.6 m) depending on rod

Maximum Field of View: 100° @ 100 ft; 90° @ 210 ft. †

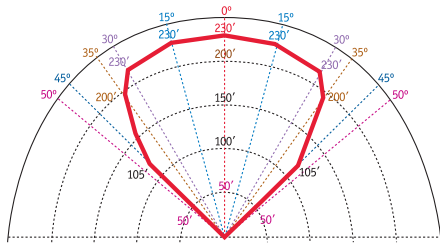

* 1 sq. ft. n-heptane fire using high sensitivity. This is a nominal value and different results may arise depending on the source of each fire.

† Maximum field of view is the angle at which FL4000H can detect flame at 50% of maximum specified range.

Accessories: Test lamp, mounting bracket

Classification: Class I, Div. 1, Groups B, C, D;
Class II, Div. 1, Groups E, F, G;
Class III
II 2GD Ex d IIC T5 Gb
Ex tb IIIC T100°C Db

Warranty: Two years

Approvals: CSA, FM, ULC, ATEX, IECEx & CE Marking.
HART registered.
SIL 3 suitable. FM certified to IEC 61508.

Environmental Specifications

Operating/Storage Temperature Range:

-40°F to +176°F
(-40°C to +80°C)

Operating Humidity Range:

0% to 95% RH,
non-condensing

Mechanical Specifications

Housing: 316 stainless steel

Height: 4.3 inches (109 mm)

Diameter: 5.4 inches (137 mm) base
3.5 inches (89 mm) optical housing

Weight: 7.9 lbs. (3.6 kg)

Mounting: Stainless steel mounting bracket

Cable Entry: 2 x 3/4 inch NPT

Electrical Specifications

Input Power: 20-36 VDC
24 VDC @ 150 mA (3.6 W)

Analog Signal: 0-20 mA (600 Ohms maximum)
3.5-20 mA (HART)

Fault Mode: 0 mA to 0.2 mA
Test Mode: 1.5 mA, ± 0.2 mA
COPM Fault: 2 mA, ± 0.2 mA
Ready Mode: 4.3 mA, ± 0.2 mA
WARN Mode: 16 mA, ± 0.2 mA
ALARM Mode: 20 mA, ± 0.2 mA

Relay Contact Rating: 8A @ 250 VAC, 8A @ 30 VDC
resistive maximum

RF/EMI Protection: Complies with EN6100-6-4: 2001 and
EN50130-4: 1995+A2: 2003

Selectable Options: Sensitivity: High, Medium or Low
Alarm Time Delay:
up to 14 seconds with dip switches and
up to 30 seconds with Modbus
Warn & Alarm Relays:
Latching/Non-Latching
Energized/De-Energized

RS-485 Output: Modbus RTU, suitable for linking up to
128 units and 247 units with repeaters

Baud Rate: 2400, 4800, 9600, 19200, or 38400 bit/s

HART: HART 6, HART Device Description
Language available. AMS Aware

Status Indicators: Two LEDs with status and fault cues

Fault Monitoring: RAM, EPROM and EEPROM checksum
errors, optics failure/blockage and low
supply voltage

Cable Requirements: 3 wire shielded cable minimum
configuration. Maximum distance
between FL4000H and power source or
remote sensor @ 24 VDC nominal
(20 Ohm loop):

14 AWG - 4,500 ft (1,370 m)

Max. distance for analog output
(250 Ohms max):

14 AWG - 9,000 ft. (2,750 m)

Standard Configuration: FL4000H-1-0-1-3-1-1-1
Dual Modbus, no relays,
0 - 20 mA, high sensitivity,
10 second delay, mounting bracket

Specifications subject to change without notice.

Represented by:

Publication #: DS-FL4000H-A1009

General Monitors Worldwide



www.generalmonitors.com
www.FL4000.com

Lake Forest, CA

26776 Simpatica Circle
Lake Forest, California 92630
Tel: +1-949-581-4464
Fax: +1-949-581-1151
Email: info@generalmonitors.com

Houston, TX

9776 Whithorn Drive
Houston, Texas 77095
Tel: +1-281-855-6000
Fax: +1-281-855-3290
Email: gmlhou@generalmonitors.com

Ireland

Ballybrit Business Park
Galway
Republic of Ireland
Tel: +353-91-751175
Fax: +353-91-751317
Email: info@gmil.ie

Singapore

No. 2 Kallang Pudding Road
#09-16 Mactech Building
Singapore 349307
Tel: +65-6748-3488
Fax: +65-6748-1911
Email: genmon@gmpacifica.com.sg

United Arab Emirates

P.O. Box 61209
Jebel Ali
Dubai
United Arab Emirates
Tel: +971-4-8143814
Fax: +971-4-8857587
Email: gmmme@generalmonitors.ae

United Kingdom

Heather Close
Lyme Green Business Park
Macclesfield, Cheshire
United Kingdom, SK11 0LR
Tel: +44-1625-619583
Fax: +44-1625-619098
Email: info@generalmonitors.co.uk