




GENERAL MONITORS
Protection for life.

MODEL IR5500

Open Path Gas Detector

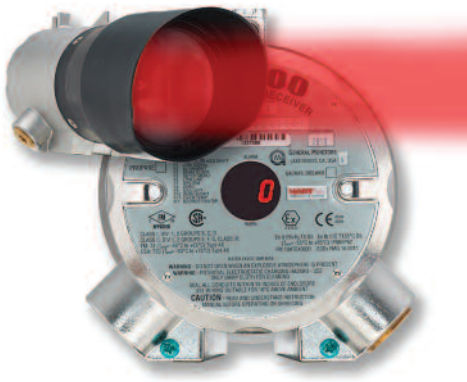

Features

- Dual detection ranges
- Performance approved
- Single detection beam
- Continuous self-check
- Multiple communication outputs (HART, Modbus, AMS Support)
- Unitized display
- Automatic gain control

Benefits

- Sensitive to both small (ppm-meter) and large (LEL-meter) gas leaks
- Ideal for use in harsh environments
- Improves accuracy and reduces drift
- Fail to safe operation
- Provides complete status and control capability in the control room
- Ease of operation, reduced cost
- Compensates for dirty optics, rain, and fog

Description

The Model IR5500 is an open path IR gas detector that provides continuous monitoring of methane and propane gas concentrations. The system consists of an IR source and receiver which continuously monitors for methane in both the 0 to 5000 ppm•meter and 0 to 5 LEL•meter range. A 0 to 2000 ppm•meter and 0 to 1 LEL•meter range is also available for monitoring propane. The IR5500 provides two 4 to 20 mA analog signals proportional to each of the above ranges, in addition to a digital display and relay contacts.

The IR5500 is easily aligned using the digital display and adjustable mounting arms, therefore it does not require any bulky setup equipment (e.g. digital volt meters, handheld alignment aids). The IR5500's sensitivity can be checked by placing a test gas film in front of the receiver.

The IR5500 is calibrated at the factory and needs no further calibration. It also requires little maintenance save for a periodic visual inspection, test gas film check, and cleaning of the windows to assure dependable performance.

Sensor data and status information from the IR5500 can be transmitted up to 9,000 feet to any industrial analog to digital (A/D) converter for use in multipoint computer-based monitoring.

Applications

- Compressor Stations
- Drilling and Production Platforms
- Fence Line Monitoring
- Fuel Loading Facilities
- Gas Turbines
- LNG/LPG Processing and Storage Facilities
- Petrochemical Tanks
- Tank Farms
- Wastewater Treatment



MODEL IR5500

System Specifications

Sensor Type:	Infrared Absorption
Dual Ranges	
<i>Methane:</i>	0 to 5000 ppm•meter 0 to 5 LEL•meter
<i>Propane:</i>	0 to 2000 ppm•meter 0 to 1 LEL•meter
<i>Consult factory for other hydrocarbon gases available.</i>	
Path Lengths:	5-30 m, 20-100 m, 80-150 m
Response Time:	T90 ≤ 3 s
Repeatability:	≤ ±5%
Linearity:	≤ ±5% of full scale for each scale or ±10% of applied gas, whichever is greater
Classification:	Class I, Div 1 & 2, Groups B, C, & D; Class II, Div 1 & 2, Groups E, F, & G Class III; Type 4X Class I, Zone 1, IIB+H ₂ II 2 G D, Ex d IIB+H ₂ T4 Gb Ex tb IIIC T135°C Db, IP66/67 (T _{amb} =-55°C to +65°C)
<i>Haz Loc:</i>	T3C (T _{amb} =-60°C to +75°C)
<i>Performance Verified:</i>	T4 (T _{amb} =-55°C to +65°C)
Calibration:	No calibration required. Field background zero adjustment provided
Modes:	Setup, alignment, test gas, run
Accessories:	Test gas films, mounting arm, mounting base, scope, attenuation plate
Warranty:	Two years
Approvals:	CSA, FM, ATEX, IECEx, DNV-GL, CE SIL 3 suitable. HART registered

Mechanical Specifications

Housing:	316 stainless steel
Source:	5.3" dia. x 12.4" length (135 mm dia. x 315 mm length)
Receiver:	5.3" dia. x 12.4" length (135 mm dia. x 315 mm length)
Weight:	Source: 12.20 lb (5.53 kg) Receiver: 12.34 lb (5.60 kg)
Conduit Entries (2):	¾" NPT (standard) M25 (optional)

Environmental Specifications

Operating Temperature Range:	-67°F to +149°F (-55°C to +65°C)
Operating Humidity Range:	0-95% RH, non-condensing

Electrical Specifications

Input Power:	20 to 36 VDC range 24 VDC @ 12 W (max.) – source 24 VDC @ 10 W (max.) – receiver (w/relays) <i>Consult factory for lower power consumption options for other configurations</i>
Dual Analog Signals:	700 ohm load max.
	0-5000 ppm•meter 0-5 LEL•meter
0 mA*	Startup/Fault
1.5 mA*	Test Gas/Setup
2 mA*	Beam Block
4-20 mA**	0-5000 ppm•m
4-12 mA***	0-5000 ppm•m
12-20 mA***	-----
21.7 mA	Over-range

	0-5 LEL•m
	Over-range
* HART units can be configured to never output current less than 3.5 mA if the host equipment is incapable of working below this level.	
** 0 to 2000 ppm•meter and 0 to 1 LEL•meter on propane unit.	
*** Using optional split range.	
Relay Ratings:	8 A @ 250 VAC/8 A @ 30 VDC res. max. Four (4) SPDT - Fault; ppm Warning, LEL Warning; and Alarm
RS-485 Output:	Modbus RTU with block and single data transfer modes
Baud Rate:	2400, 4800, 9600, 19200, or 38400 BPS
HART:	HART 6, Device Description available. AMS Device Manager support
RFI/EMI Protection:	Complies with EN 61000-6-4 and EN 50270
Sample Cable Distances:	For cable resistance of 3 ohms/1,000 ft, maximum distance between IR5500 and power source @ 24 VDC: 14 AWG - 1,330 ft (405 m) - receiver, 14 AWG - 1,040 (317 m) - source. For 16 AWG cable with cable resistance of 5 ohms/1,000 ft, maximum distance for analog output (100 ohms max.): 10,000 ft (3,048 m).
Wireless Communication:	Available with ELPRO Technologies wireless devices
Digital Display:	LED indication of scale displayed; Two digit, seven segment (auto range change)
Standard Configuration:	IR5500-1-1-1-1-1-2-1-1-1-1 Methane, Dual 0-20 mA, Dual Modbus, relays, mounting arm, 20-100 m path length

Specifications subject to change without notice.

Represented by:

General Monitors Worldwide



www.generalmonitors.com

Lake Forest, CA

26776 Simpatica Circle
Lake Forest, California 92630
Tel: +1-949-581-4464
Fax: +1-949-581-1151
Email: info@generalmonitors.com

Houston, TX

9776 Whithorn Drive
Houston, Texas 77095
Tel: +1-281-855-6000
Fax: +1-281-855-3290
Email: gmh@generalmonitors.com

Ireland

Ballybrit Business Park
Galway
Republic of Ireland
Tel: +353-91-751175
Fax: +353-91-751317
Email: info@gmil.ie

Singapore

Block 5, Amk Tech II, #05-20/22/23
Ang Mo Kio Industrial Park, 2A
Singapore 567760
Tel: +65-6748-3488
Fax: +65-6748-1911
Email: genmon@gmpacifica.com.sg

United Arab Emirates

P.O. Box 61209
Jebel Ali
Dubai
United Arab Emirates
Tel: +971-4-8143814
Fax: +971-4-8857587
Email: gmme@generalmonitors.ae

United Kingdom

Heather Close
Lyme Green Business Park
Macclesfield, Cheshire
United Kingdom, SK11 0LR
Tel: +44-1625-619583
Fax: +44-1625-619098
Email: info@generalmonitors.co.uk